




XOWF2000SYS

Advanced Home Water Filtration System
Maximum Scale Prevention for Ice Makers

TWO STAGE WATER FILTER



**EASY TWIST ON | OFF
REPLACEMENT**



Commercial quality built for your home, ideal for use with ice makers, wet bars and kitchens. This advanced design removes common contaminants such as lead and chlorine from drinking water to deliver healthier better tasting, odor free water.

Powered by CITRYNE for Maximum Scale Inhibition.



Meets NSF/ANSI 53 Standards for Lead Reduction up to 99%



Eliminates chlorine taste and odor



Filters up to 3000 gallons per year



Filters out sediment, rust & dirt to 0.5 microns



Inhibits scale formation without blocking vital minerals



NSF/ANSI Standard 53 Certified to reduce cysts such as Giardia & Cryptosporidium by mechanical means.

POWERED BY



**MAXIMUM
Scale Inhibition
MINIMIZES
Maintenance**



ICE MAKERS



WET BARS



KITCHENS



PREP SINKS



POT FILLERS



ANSI/NSF International Standards

The Model XOWF2000L (ref: FF-C10L) has been tested and certified by NSF International against ANSI/NSF Standard 53 for health affects.





One Filter replaces
22712
bottles
each year



WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

*based on average residential usage less than 3000 gallons

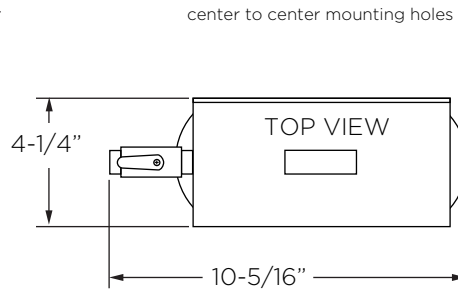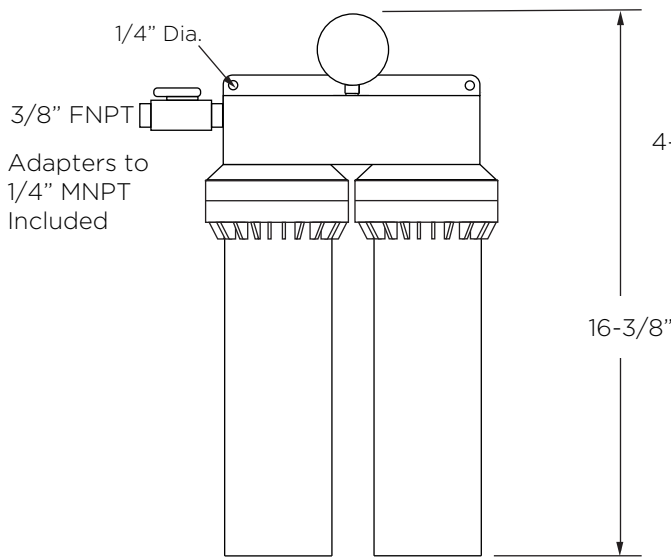

REPLACEMENT CARTRIDGES:
XOWF2002
 NSI ref: FF-C10L
 Contains one each of cartridges XOWF2000L & XOWF2000C

IMPORTANT NOTE:
 Cartridges install from below
 Keep 2" clearance beneath the unit



ANSI/NSF International Standards
 The Model XOWF2000L (ref: FF-C10L) has been tested and certified by NSF International against ANSI/NSF Standard 53 for health effects

FEATURES

FINISH

Food grade polymer construction

FILTER

- Commercial quality activated carbon block filtration element (0.5 micron) to remove sediment, lead, chlorine and harmful cysts.
- Reduces Lead by up to 99% **
- Inhibits scale to reduce costly maintenance issues with ice makers and other appliances
- Easy DIY filter cartridge replacement without tools
- Pressure gauge included to see when filter replacement is indicated.
- Made in the USA.

SPECIFICATIONS

- CONNECTION** 3/8" FNPT
- MAX PRESSURE** 125 PSI
- MAX FLOW RATE** 1.67 gpm
- MAX TEMPERATURE** 100°F
- SEDIMENT REDUCTION** 0.5 MICRON
- LEAD REDUCTION** Up to 99%**
- OVER ALL DIMENSIONS** 16-3/8" H x 10-5/16" W x 4-1/4" D
- NET WEIGHT** 5.5 lbs

** Cartridges should be changed out every twelve months or when there is a reduction in water pressure. Filter life depends greatly upon water quality and volume usage. This product is for residential use only and must be installed and maintained according to manufacturers guidelines www.xoappliance.com or the warranty can be voided.

WARNING:
 This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.

